

EON 2P120X80



MULTIFUNCTION SHOWER CUBICLE - SLIDING DOOR AND SIDE PANEL

Dimensions				Code	Left	Right	Mixer	Hydro-massage	Dome	Glass	Profile type					
Dimensions (cm)	Shower tray (cm)	Overall height (cm)	Access (cm)								White gloss			White Matt		
					S	D	T			1	AA	AB	AK	UA	UB	UK
					Left	Right	Thermo-static			Clear	White	Silver	Chrome	White	Silver	Chrome

STANDARD Without dome



120 x 80	4,5	209,5	47	EON2P120	S	D	T-									
120 x 80	11,5	216,5	47	EON2P129	S	D	T-									

STANDARD With dome



120 x 80	4,5	214	47	EON2P120	S	D	T		T-							
120 x 80	11,5	221	47	EON2P129	S	D	T		T-							

HYDROMASSAGE Without dome



120 x 80	4,5	209,5	47	EON2P120	S	D	T	1-								
120 x 80	11,5	216,5	47	EON2P129	S	D	T	1-								

HYDROMASSAGE With dome




120 x 80	4,5	214	47	EON2P120	S	D	T	1	F-							
120 x 80	11,5	221	47	EON2P129	S	D	T	1	F-							


HAMMAM (steam shower)



120 x 80	4,5	214	47	EON2P120	S	D	T	1	F-							
120 x 80	11,5	221	47	EON2P129	S	D	T	1	F-							



S Left



D Right

● IN STOCK UK

(Other products) please check availability

OPTIONAL



Opal acrylic seat

SED03OPL

REQUIRED



Compulsory

Imperial to Metric flex waste adaptor



Code

RISCCAB


Construction of the Code: Code + Left/Right + Mixer + Hydromassage + Dome + Glass + Profile = Final product Code




EON

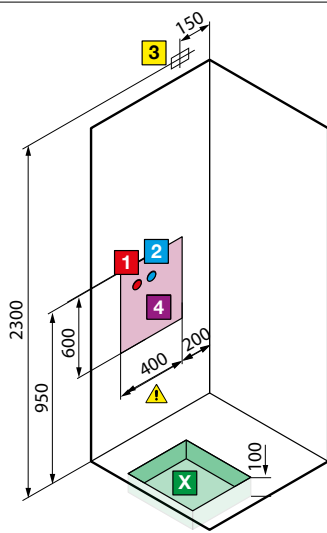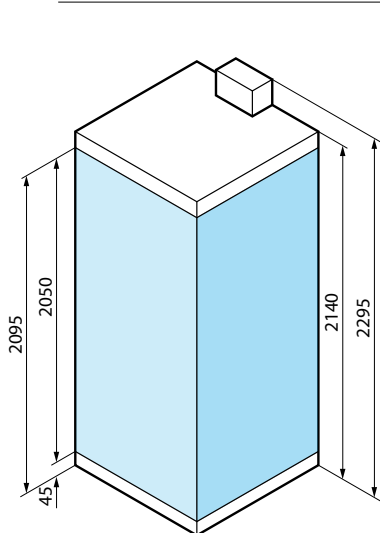

for model
A80 - GF/A90 - R90

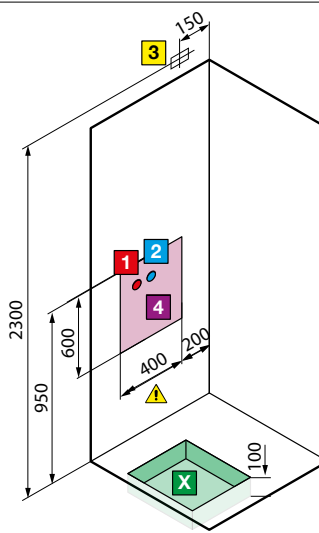


Left version

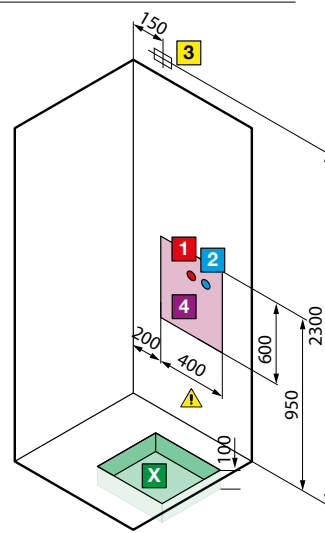


Right version

for model **A100x80 - 2P120x80 - 2P120x90**




Model	A $\pm$ 4	B $\pm$ 4
A80	802	802
GF/A90	902	902




Model	A $\pm$ 4	B $\pm$ 4
R90	902	902




S LEFT



D RIGHT



Model	A $\pm$ 4	B $\pm$ 4
A100x80	1002	802
2P120x80	1202	802
2P120x90	1202	902




HYDRAULIC CHARACTERISTICS:



Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection $\varnothing$ 40 mm

ELECTRICAL CHARACTERISTIC:


Supply voltage 220 - 230 V
Frequency 50/60 Hz
Maximum absorbed power: 2500 W
Maximum absorbed power HAMMAM: 2600 W
Maximum absorbed power BASE & IDRO: 50 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening $\geq$ 3 mm.




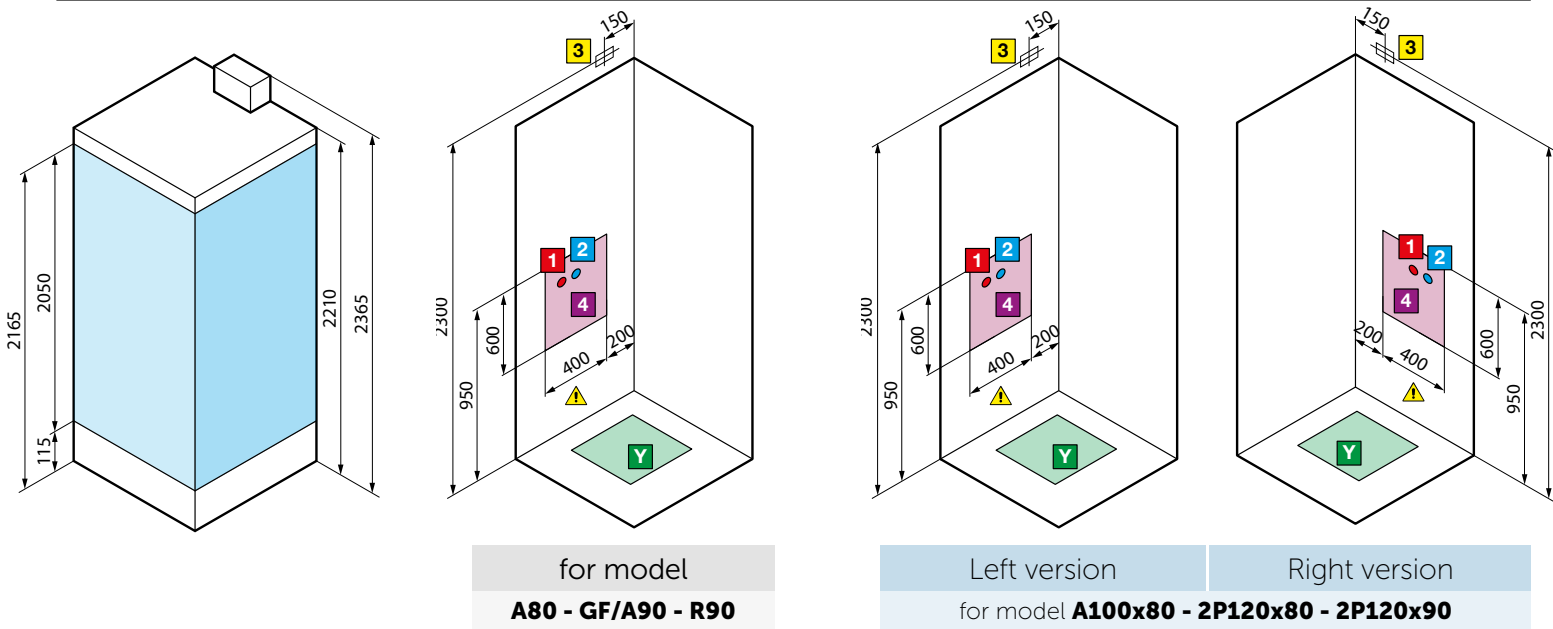


Model	A ± 4	B ± 4	C	D	E
A80	802	802	150	400	400
GF/A90	902	902	150	500	500



Model	A ± 4	B ± 4	C	D	E
R90	902 ± 4	902	156	500	500

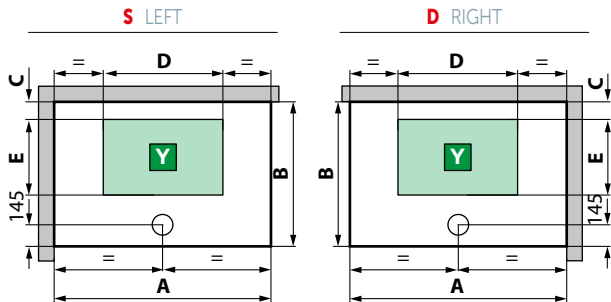

Model	A ± 4	B ± 4	C	D	E
A100x80	1002	802	150	600	400
2P120x80	1202	802	150	800	400
2P120x90	1202	902	150	800	500

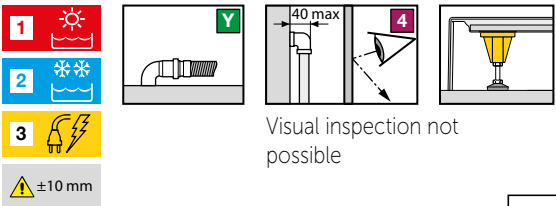

HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage 220 - 230 V
Frequency 50/60 Hz
Maximum absorbed power: 2500 W
Maximum absorbed power HAMMAM: 2600 W
Maximum absorbed power BASE & IDRO: 50 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

